


Smart Touch Switch



Prix




Prix constaté (20/03/2021) : 4.31€

Prix promo (21/03/2021) : 3.46€

<https://fr.aliexpress.com/item/1005001403728029.html>

Dimensions

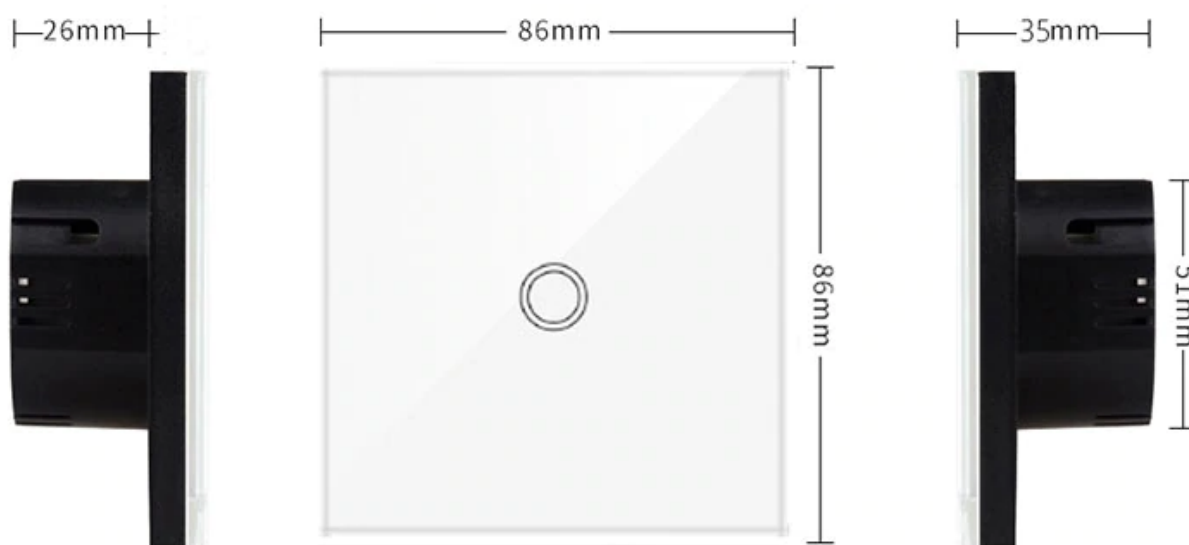

Thin thickness

The switch panel is only 10mm, it is fashionable and beautiful and does not occupy space



Wear-resisting



Light and thin



waterproof




Easy cleaning

Branchement et montage




Single Live Design, No need Neutral Wire

Easy upgrade old 86mm*86mm switch

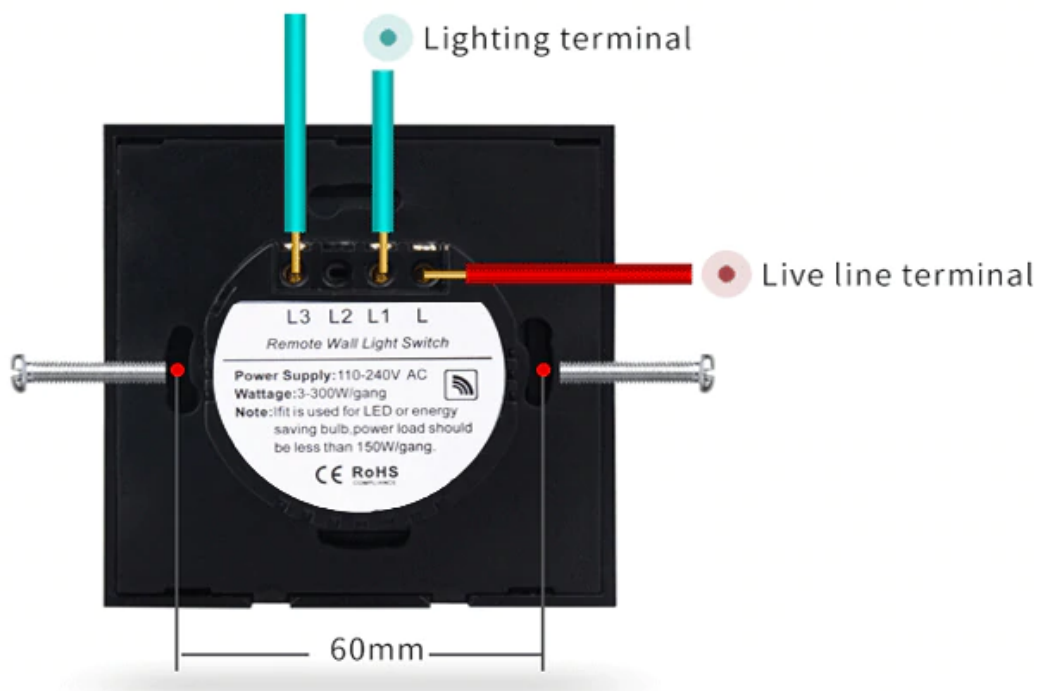

Si vous utilisez cet interrupteur pour des LED ou des ampoules à économie d'énergie, la puissance de charge doit être de 150W maximum par ligne.

Manuel d'utilisation



SMART TOUCH SWITCH

Quick Installation Guide

M1

Suitable places:

smart touch switch for home, hotel, office and other lighting. Not suitable for factories, hospitals CT /nuclear magnetic resonance, room and other places with strong electromagnetic interference.

Applicable lamps:

LED lamp, incandescent lamp, energy-saving lamp, electronic rectifier drive fluorescent lamp, in order to smart touch switch more stable and reliable work, please adopt the regular LED, energy-saving lamps and other lamps and light sources. The load can't connect with inductance ballast driven fluorescent lamp

Install the switch with electricity off

Do not install in damp environment

Do not exceed the maximum load

Please follow instructions and properly install

Note:

the switch must be installed without electricity, electricity must be turn on after the installation(cover the glass touch

M2



Industry grade design capacitance touch screen, touch sensitive & quick response. Ultra-low power design, more energy saving, more environmental.



Ultra clear tempered glass panel, fashion design. you can touch it with wet hand very safe.



Unique night indicator design, luxury, fashion. Convenient for old people & children.



Equipped with smart host, it can be controlled through internet, and also the light ON/OFF status can be checked.



Single live wire installation, compatible with traditional switch installation method. No need to change the original circuit



Distinctive style, suitable for apartment, foreign-style house, villa, office building, hotel and etc.

M3

Voltage : 110V-240V AC
 Dimension : 86*86*34 mm
 Material : Panel: Ultra clear tempered glass panel
 Back shell: fire restriction PC
 Load Power: 3-300W/gang
 (Note: If it is used for LED or energy saving bulb,
 Power load should be less than 100W/gang.
 The load can't connect with inductance ballast
 driven fluorescent lamp)
 RF Frequency: 433.92MHz
 Working Environment: Temperature: -10~60°C
 Humidity: 10%-95%

Note: the switch must be installed without electricity, electricity must be turn on after the installation(cover the glass touch panel), touch for test after 10 seconds, or the switch will not work well.

M4

(suitable for remote switch series)

- 1.How to use a button to turn it ON & OFF ?
Press the touch button for few seconds when rings a beep, And then press remote any key, power ON and OFF control can be realized.
- 2.How to use a button to turn it ON ?
Press the touch button for few seconds when rings two beep, And then press remote any key, power ON control can be realized.
- 3.How to use a button to turn it OFF ?
Press the touch button for few seconds when rings three beep, And then press remote any key, power OFF control can be realized.
- 4.How to cleanup the code ?
Press the touch button for few seconds when rings four beeps, The code will be cleared.



M5


About the dimmer switch

1. How to use a button to turn it ON & OFF ? Press the touch button till the Backlight first flash , and then press remote, power ON and OFF control can be realized .
2. How to let the light dim Press the touch ON/OFF button till the backlight flash two time , And then press remote any key , power Down control can be realized .
3. How to let the light up , Press the touch ON/OFF button till the backlight flash three time , And then press remote any key , power dim up control can be realized .
4. How to cleanup the code Press the touch ON/OFF button till the backlight flash four time , The code will be cleared .

M6

1. Remove the panel with screwdriver


(Please don't install with electricity power on)

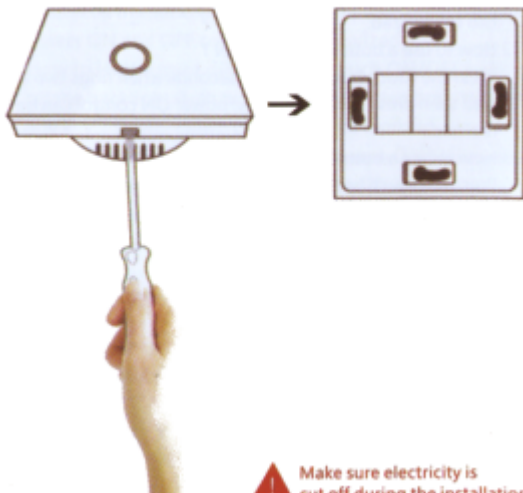

M7

2. Prepare to connect wires


- a. Live wire connects "L" terminal
- b. Lamp wire connects "L1,L2,L3" terminal

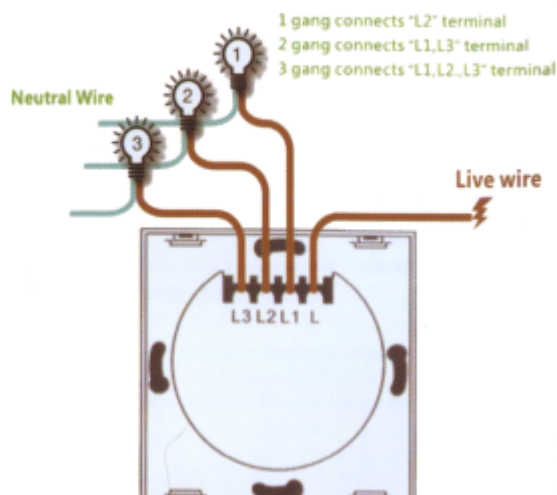

M8

3. Fix the switch onto wall

- a. Put the switch into switch box in the wall
- b. Mount the two side screws
- c. Install the glass panel (install from up above)
- d. Finish installation
- e. Turn on electricity, touch after 10 seconds

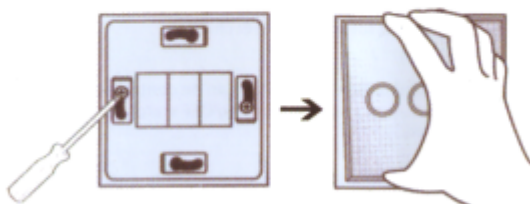


Note: the switch must be installed without electricity, electricity must be turn on after the installation(cover the glass touch panel), touch for test after 10 seconds, or the switch will not

M9

1. When the lamp appears shiny or flickering

When the lamp appears shiny or flickering, please connect the Yellow capacitor between the neutral wire and the live wire of the lamp, then the switch will work well with the light, as shown in the picture




2. Switch is installed, touch but no react

First make sure that the wiring is properly connected in accordance with the wiring diagram, ensure that the lamp has been connected (or not damaged).

1. disconnect power supply for 1 minutes
2. install the switch, cover the glass panel
3. turn on power,

M10

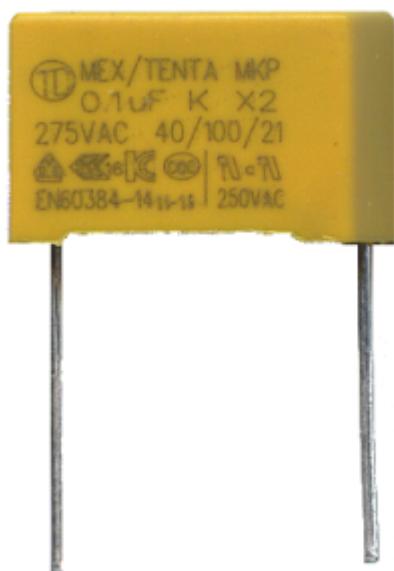

M11

From:

<https://www.abonnel.fr/> - notes informatique & technologie

Permanent link:

<https://www.abonnel.fr/electronique/depannage/smart-touch-switch/index>

Last update: 2021/03/21 21:39

